




"NCO" Timber Acoustic Panel


Test Report

Acoustics:


NCO 12M516PG with 25mm cavity filled with 25mm thick 48kg/m³ fibreglass

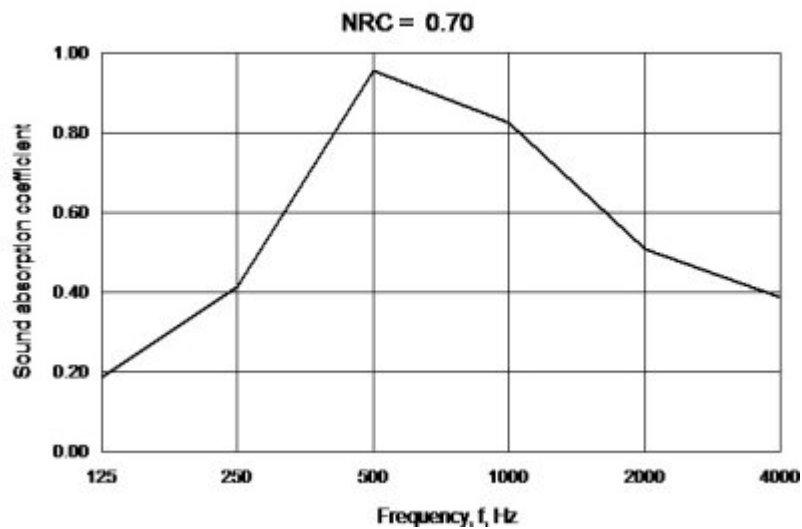


NCO 12M516PG with 50mm cavity filled with 25mm thick 48kg/m³ fibreglass

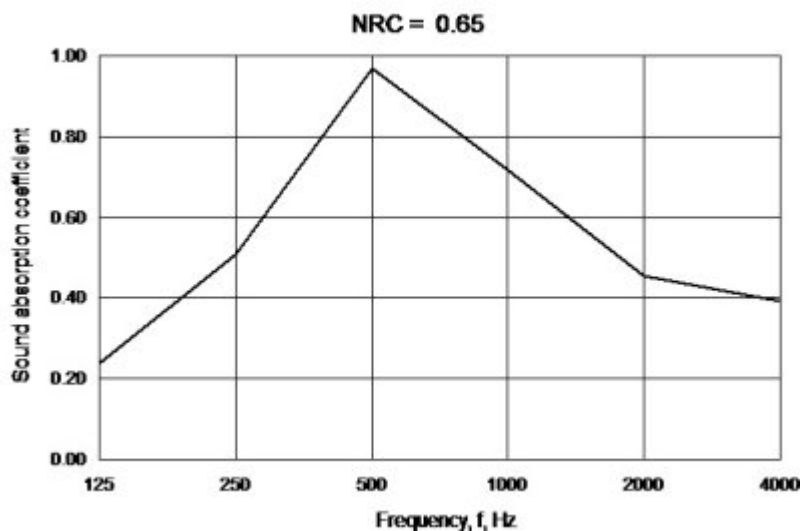


NCO 12M516PG with 100mm cavity filled with 25mm thick 48kg/m³ fibreglass

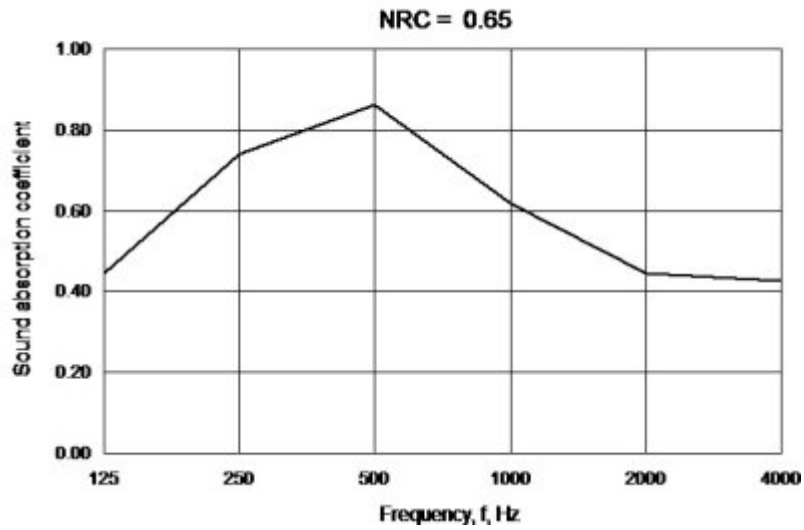


NCO 12M516PG with 400mm cavity filled with 25mm thick 48kg/m³ fibreglass

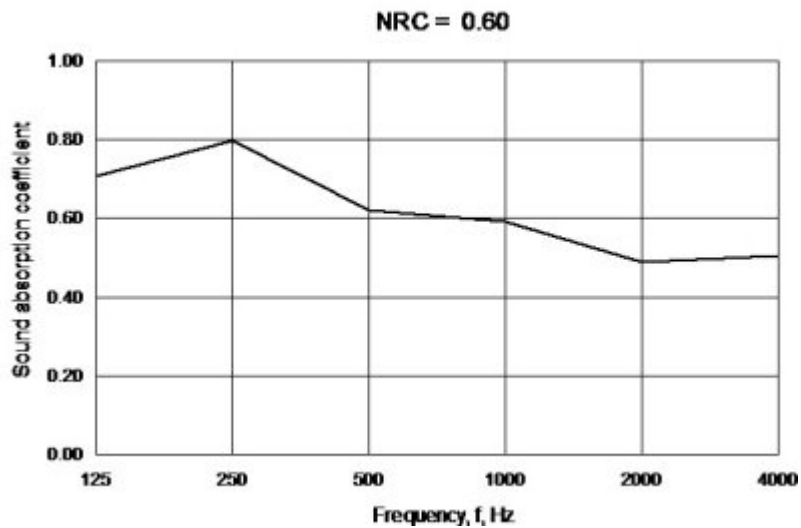


NCO 12M832PG with 25mm cavity filled with 25mm thick 48kg/m³ fibreglass

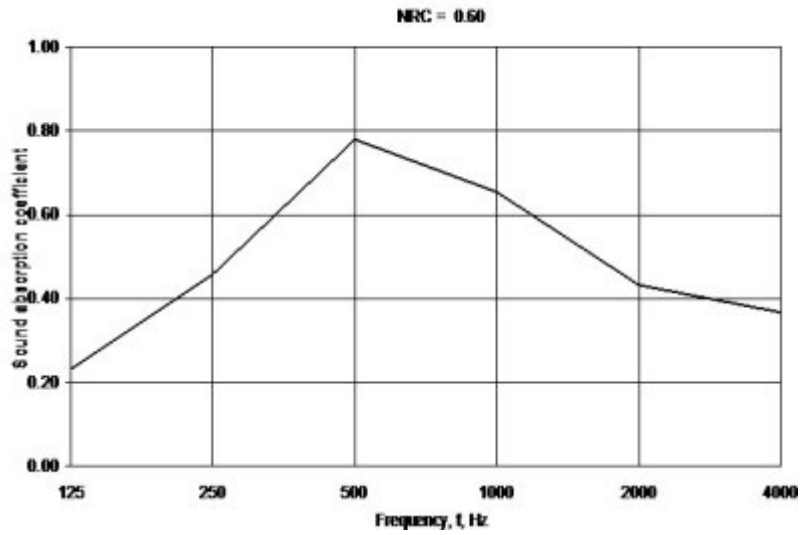


NCO 12M832PG with 50mm cavity filled with 25mm thick 48kg/m³ fibreglass

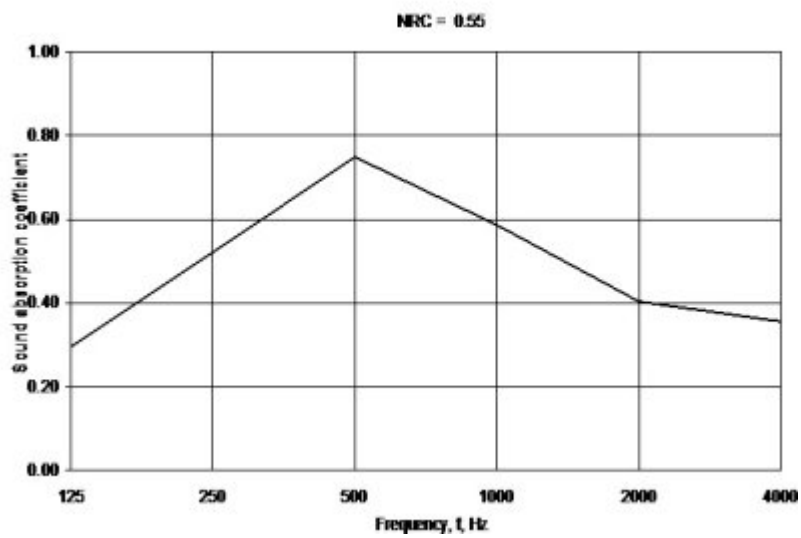


NCO 12M832PG with 100mm cavity filled with 25mm thick 48kg/m³ fibreglass

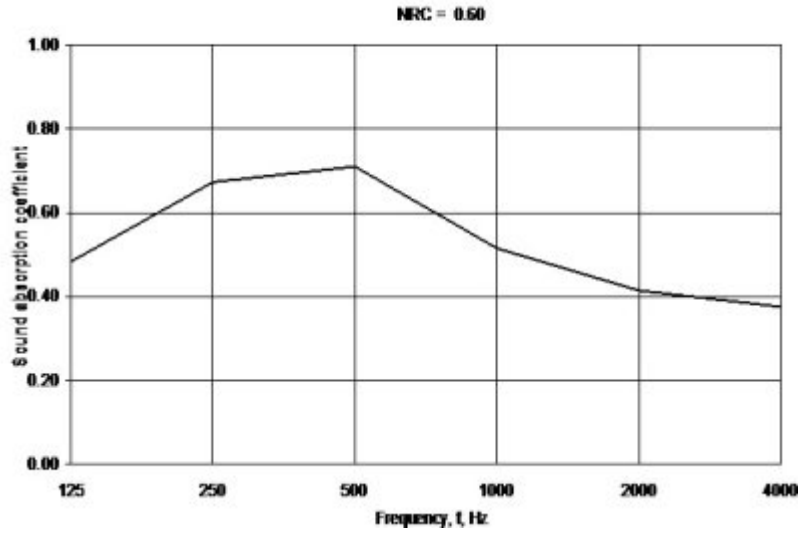


NCO 12M832PG with 400mm cavity filled with 25mm thick 48kg/m³ fibreglass

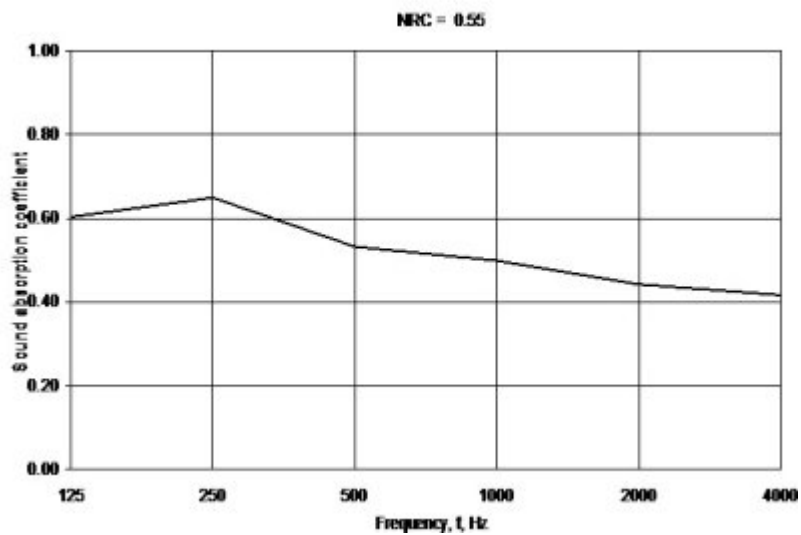


NCO 15M -313LG with 35mm cavity fitted with 25mm thick 48kg /m 3 fibreglass

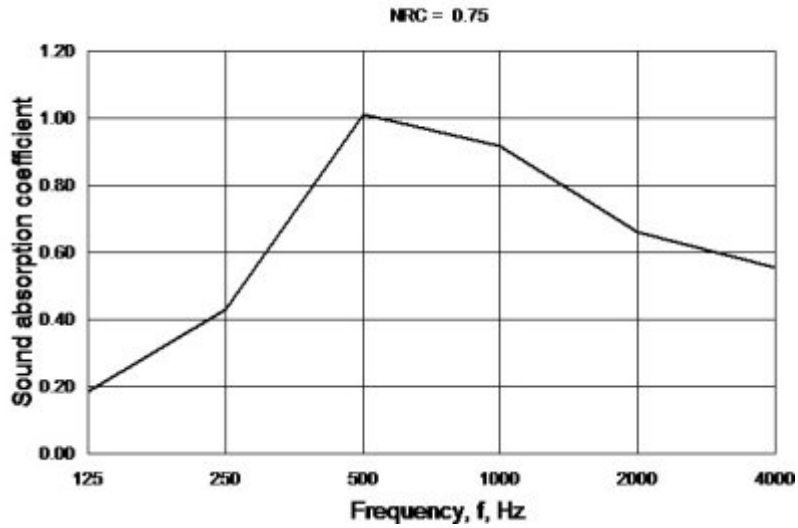


NCO 15M-313LG with 60mm cavity fitted with 25mm thick 48kg/m 3 fibreglass

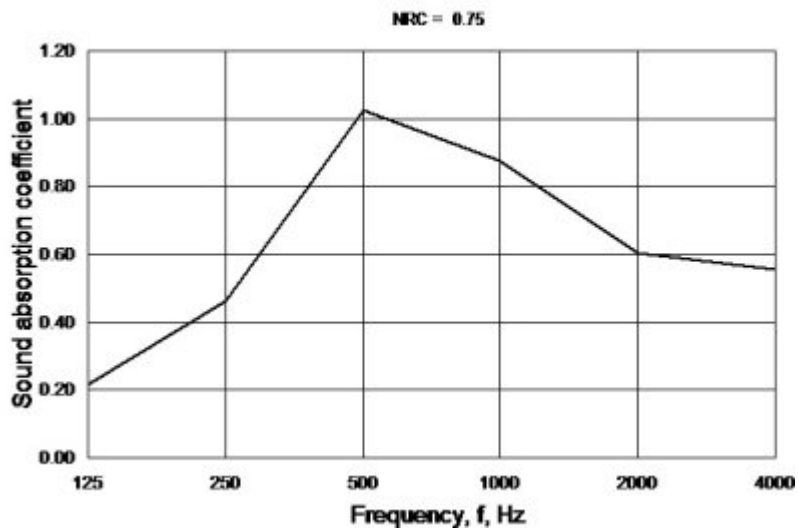

NCO 15M-313LG with 110mm cavity fitted with 25mm thick 48kg/m³ fibreglass

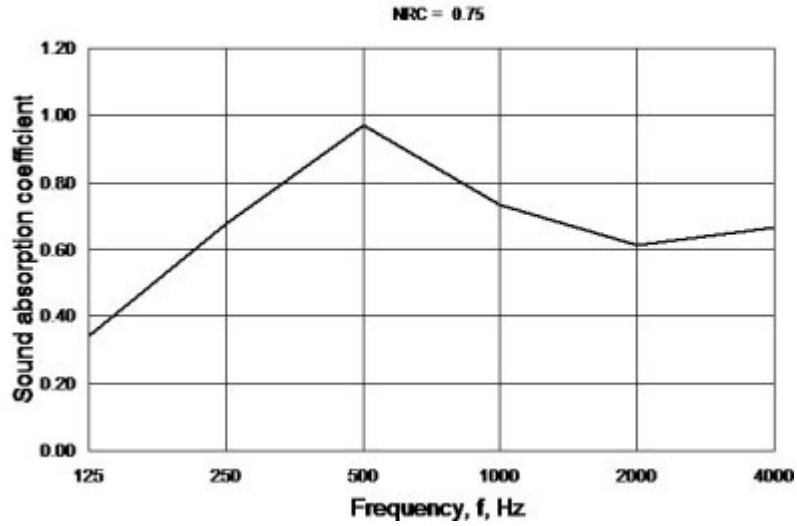

NCO 15M-313L with 35mm cavity

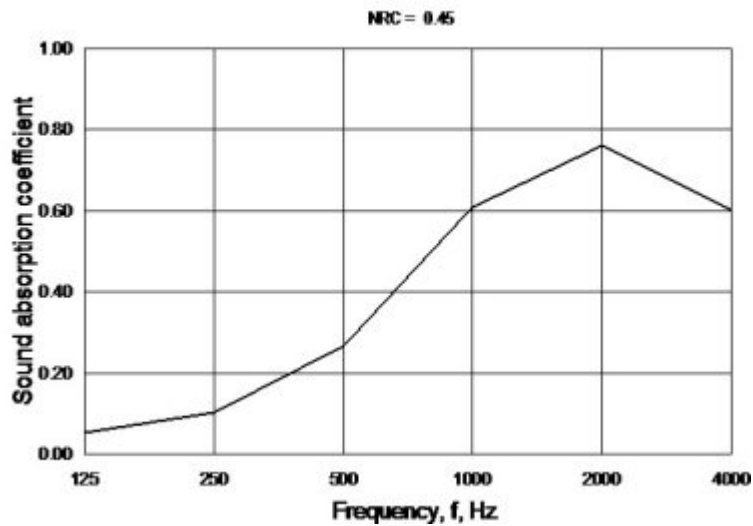

NCO 15M-313L with 110mm cavity

